


# CP- UNC-TA20L3S-V2

2MP Full HD IR Bullet Camera - 30Mtr.

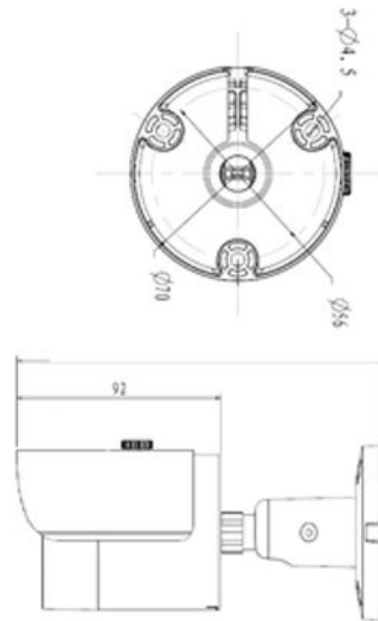

## Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- 25/30fps@2MP
- H.264Plus and H.264 dual-stream encoding
- DWDR, Day/Night (ICR), 3DNR, AWB, AGC, BLC
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNC-TA20L3S-V2

## 2MP Full HD IR Bullet Camera - 30Mtr.



### Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Back Light Compensation

Video Compression

S/N Ratio

Resolution

Frame Rate

Motion detection

Privacy Mask

ICR

Bit Rate

Protocol

Ethernet

User Account

IR

Smart Phone

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

### Specification

1/2.7" 2MP PS CMOS Image Sensor

1920(H) x 1080(V)

0.1Lux/ F2.0(Color), 0Lux/ F2.0(IR on)

Auto/Manual, 1s~1/100000s

Auto/Manual

2.8mm (3.6mm optional)

Auto/Manual

BLC/ HLC/ DWDR

H.264+/ H.264

More than 50dB

1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480) /CIF(352x288/352x240)

Main Stream :1080P(1 ~ 25/30fps),Sub Stream :D1(1 ~ 25/30fps)

Supports

Up to 4 areas

Auto (ICR)/Color/B/W

H.264: 5kbps~8192bps

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF, CGI

RJ-45 (10/100Base-T)

20 Users

IR Range of 30 Mtr.

iPhone, iPad, Android Phone

-30°C~+60°C , Less than 95%RH

DC12V, PoE (802.3af)

<5.1W (IR on)

IP67

Φ70mm x 165mm

0.38Kg(with package 0.44 Kg)