

An alternative to a closed server cabinet, this open frame has a load capacity of up to 500 kg (at distributed load). It is the ideal solution in a lockable and dust-free server room.

- 19" mounting angles
- 19" mounting angles bearing height unit marking
- Base featuring tilt stopper

Technical Data

Dimensions HxWxD in mm	2057x525x434
Height in U	42
Frame	19" vertical extrusions
Colour	RAL 9005
Grounding point	Main frame

Standards

EN 62208-2004, EN 1993-1-3:2008, CE – Declaration of Conformity
EN 1991-1-1:2004

Mechanical characteristics


Frame construction	Cold-rolled steel
Load rating	500 kg

Environmental characteristics


IP rating	none
-----------	------

Drawing

Side view

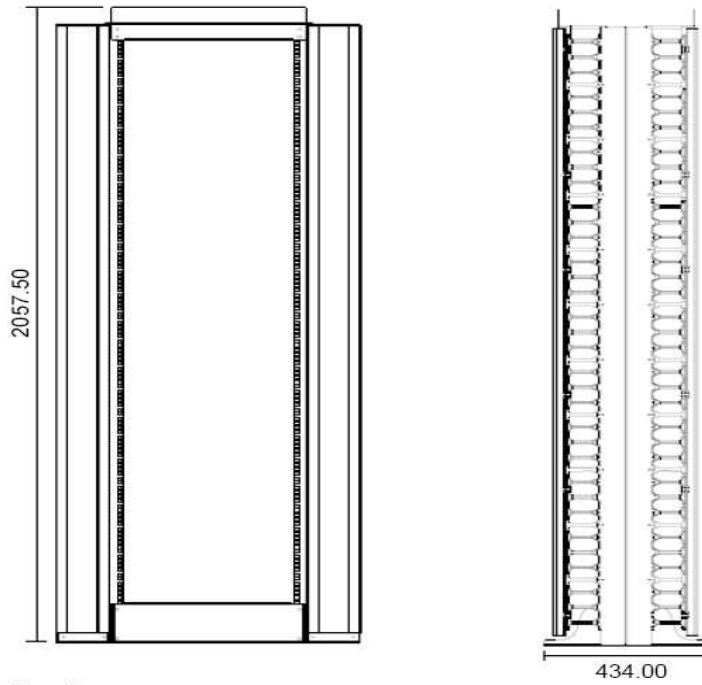

Top view

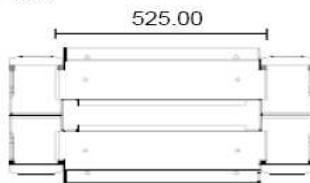

Ordering information

Description	PU	Part number
19" Open Rack Main Frame 42U, 525x434 mm	1	R205000

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.