

4MP IR IP H.265 COMPACT DOME CAMERA



ENV-HCD7F-30R-91

FEATURES

Low light Illumination
Day/night functionality
Smart IR, Up to 30M
H.265+, H.265, H.264
ONVIF (Profile S/G/T)
Support PoE power supply
IP67



*



SPECIFICATION

MODEL	Model No.	ENV-HCD7F-30R-91
CAMERA	Type	4MP IR IP H.265 Compact Dome camera
	Image Sensor	1/2.8", 4.0 Megapixel, Progressive scan, CMOS
	Signal System	PAL/NTSC
	Lens	2.8 mm Fixed Lens
	Lens Mount	M12
	Aperture	F1.6, Fixed
	Angle of View (H)	93.8°
	Adjustment Angle	Pan 0~340°, Tilt 0~75°, Roate 0~360°
	Day/Night	Dual IR Cut Filter with Auto Switch
	Shutter	Auto/Manual, 1~1/100000 s
	Min. Illumination	Colour: 0.001Lux @F1.6 B/W: 0Lux with IR
	AGC	Auto/Manual
	Smart IR	Up to 30M
	IR LEDs	2
	Wavelength	850nm
	SNR	>52dB
	Defog	Digital Defog
	Digital noise reduction	2D/3D DNR
WDR	120dB	
VIDEO & AUDIO	Max.Resolution	2592x1520
	Video Compression	H.265+, H.265, H.264
	Frame Rate	Main Stream: (2592x1520, 2560x1440, 2304x1296, 1920x1080, 1280x720) @25/30fps Sub Stream: (704x576, 704x288, 640x360, 352x288) @25fps (704x480, 704x240, 640x360, 352x240) @30fps
	Video Bit Rate	32Kbps~6Mbps
Image Setting	Saturation, Brightness, Contrast, Sharpness, Adjustable by client software or web browser	



4MP IR IP H.265 COMPACT DOME CAMERA




ENV-HCD7F-30R-91

SPECIFICATION

MODEL	
Model No.	ENV-HCD7F-30R-91
Type	4MP IR IP H.265 Compact Dome camera
VIDEO & AUDIO	
HLC/BLC	Supported
Motion Detection	Supported
Picture Overlay	Supported
OSD	Up to 3 OSDs
Privacy Mask	Up to 4 areas
Audio Compression	G.711U/G.711A
Audio Bit Rate	8K~48Kbps
Alarm Prompt	Mask Alarm, IP Address Conflict, Motion Detection
Smart Function	Crossline, Intrusion
INTERFACE	
Protocols	IPv6, IPv4, TCP/IP, HTTP, FTP, DHCP, DNS, DDNS, MULTICAST, NTP, UDP, Telnet
Compatibility	ONVIF (Profile S/G/T), SDK, API (Optional)
Network	1 RJ45 10M/ 100M self adaptive Ethernet port
Remote Connection	≤7
Client	Eyeconnect
Web Version	Web6
Built in Mic	Supported
GENERAL	
Power Supply	12V DC, PoE (IEEE802.3 af)
Power Consumption	Max.7W
Edge Storage	Micro SD Card Slot, Up to 512 GB
ANR	Supported
Working Environment	-35°C ~ +65°C, Humidity : ≤95% RH(Non-condensing)
Ingress Protection	IP67
Surge Protection	Supported
Lightning protection	Supported
Web Client Language	English, Russian, Spanish, Korean, Italian, Turkish, Thai, French, Polish, Dutch, Hebraism, Arabic, Vietnamese
Dimensions	116.6 x 116.6 x 83.7mm
Weight	0.47Kg

Dimension Unit: mm

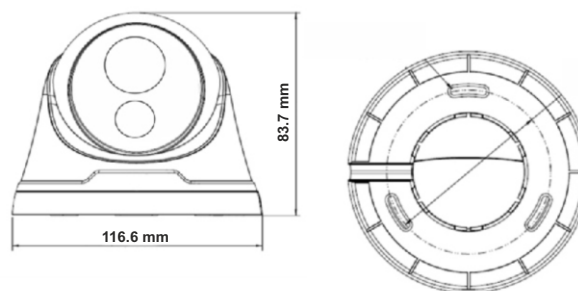

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCD7F-30R-91	4MP IR IP H.265 Compact Dome camera with 2.8 Fixed Lens, POE, WDR, SD card slot, Built in Mic and 30M IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENV-HCD7F-30R-91	Carton Box	0.47	116.6 x 116.6 x 83.7

*The image is for reference purpose only. The actual product may vary in shape or appearance.

