

4MP IR IP H.265 VANDAL PROOF DOME CAMERA



ENV-HVD7M-30R-20

FEATURES

Day/night functionality
Smart IR, up to 30M
2D/3D DNR
H.265+, H.265, H.264, MJPEG
Triple streams
IP67
IK10



UL No: **E491809**



SPECIFICATION

MODEL	Model No.	ENV-HVD7M-30R-20
CAMERA	Type	4MP IR IP H.265 Vandal Proof Dome Camera
	Image Sensor	1/3", 4.0 megapixel, progressive scan, CMOS
	Lens	2.7~ 13.5mm
	Angle of View (H)	28.6°~100.1°
	Zoom/Focus	AF automatic focusing and motorized zoom lens
	Shutter	Auto/Manual, 1 ~ 1/100000s
	Min. Illumination	Colour: 0.002Lux @(F1.35), 0 Lux with IR
	AGC	Auto/Manual
	IR Range	30M
	Day/Night	IR-cut filter with auto switch (ICR)
	Digital noise reduction	2D/3D
	S/N	>56dB
	WDR	120dB
	Defog	Digital Defog
VIDEO & AUDIO	Max. Resolution	2688 × 1520
	Video Compression	H.265+, H.265, H.264, MJPEG
	Frame Rate	Main Stream: 4MP (2688*1520), Max 30fps; 4MP (2560*1440), Max 30fps; 3MP (2304*1296), Max 30fps; 2MP (1920*1080), Max 30fps; Sub Stream: 1080P (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps
	Video Streaming	Triple
	Corridor Mode	Supported
	ROI	Up to 8 areas
	OSD	Up to 8 OSDs
	Privacy Mask	Up to 8 areas
	HLC/BLC	Supported
	Motion Detection	Up to 4 areas
Audio Compression	G.711U/G.711A	
Two-way audio	Supported	



4MP IR IP H.265 VANDAL PROOF DOME CAMERA




ENV-HVD7M-30R-20

SPECIFICATION

MODEL	Model No.	ENV-HVD7M-30R-20
	Type	4MP IR IP H.265 Vandal Proof Dome Camera
SMART	Behavior Detection	Intrusion, Crossing line, Motion detection, Abandoned Object, Missing object
	Exception Detection	Audio detection
	Intelligent Identification	Face detection, Defocus, Scene Change
	Statistical Analysis	People counting
	General	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication, Password protection
INTERFACE	Protocols	IPv6, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, NAS
	Compatibility	ONVIF (Profile S/G), API
	Network	1 RJ45 10M/100M Base-TX Ethernet
	Audio I/O	1/1
	Alarm I/O	1/1
GENERAL	Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption	Max 7.5W
	Edge Storage	Micro SD Card, Up to 256GB, ANR Support
	ANR	Supported
	Reset Button	Supported
	Working Environment	-35°C ~ +60°C, Humidity ≤ 95% RH(Non-condensing)
	Surge Protection	6KV
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Dimensions	148x148x111.3 mm
Weight	0.93 kg	

Dimension Unit: mm

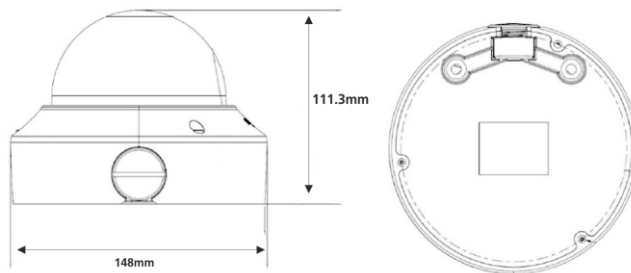

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HVD7M-30R-20	4MP IR IP H.265 Vandal Proof Dome camera with 2.7 to 13.5mm Motorized Lens, POE, SD card slot, WDR, Smart Analytics and 30M IR support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENV-HVD7M-30R-20	Carton Box	0.93	148x148x111.3

