



Cabinet system designed for use as network cabinet in network environments.

- 2 pairs of 19" mounting angles (front/back)
- Swing handle with lock
- Perforated front door 63% ventilation
- Perforated back door 63% ventilation

### Technical Data

|                        |   |
|------------------------|---|
| Dimension H*xWxD in mm | *1942x800x1100 (useful depth 745) (*without feet) |
| Height in U            | 42  |
| Frame                  | 19" vertical extrusions (front and back)          |
| Gross weight           | 122kg   |
| Colour                 | RAL 9005  |
| Grounding concept      | Each sheet steel pieces                           |
| Grounding point        | Main frame  |

### Standards

|   |              |
|---|--------------|
| EN 12150-1  | Safety glass |
| EN 62208-2004, EN 1993-1-3:2008, CE – Declaration of Conformity |              |
| EN 1991-1-1:2004  |              |


### Mechanical characteristics

|                           |  |
|---------------------------|--|
| Welded frame construction | 1.5mm sheet steel                                  |
| Load rating               | 1000kg   |
| Removable cable entry     | 300x150mm  |
| Front door                | Round vented door with swivel handle universal key |
| Side panel                | 4 side panel, sheet steel                          |
| Rear door                 | 2 perforated sheet steel                           |
| Door opening angle        | 180°   |


This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

**Drawing**

Front and Side view

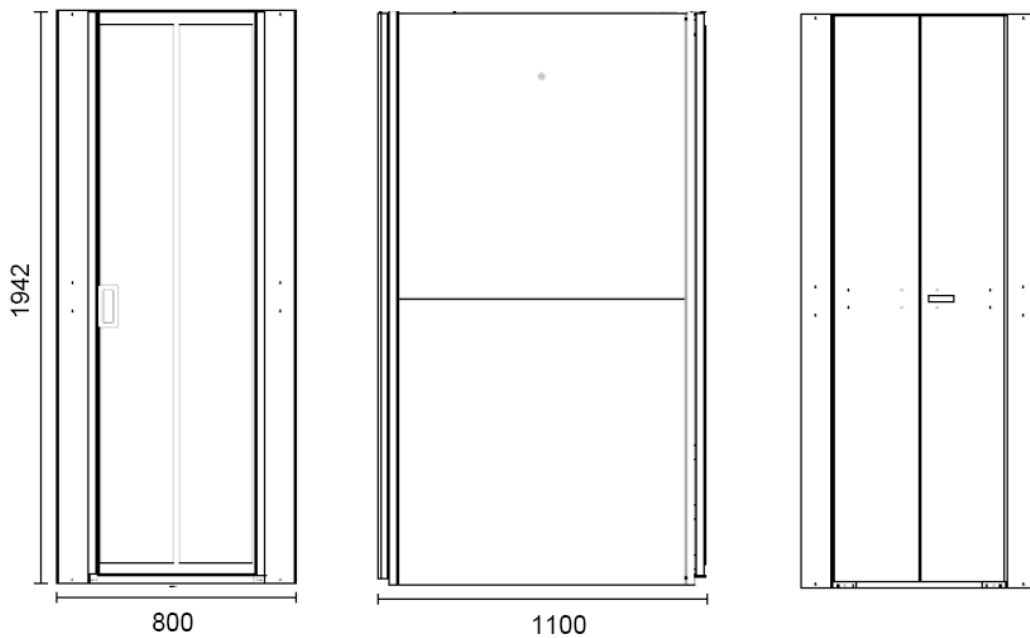

Top view

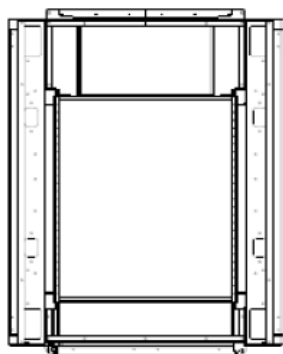

**Ordering information**

| Description                          | PU | Part Number |
|--------------------------------------|----|-------------|
| 19" Network Cabinet 42U, 800x1100 mm | 1  | R205214     |

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

