



Cabinet system designed for use as network cabinet in network environments.

- 2 pairs of 19" mounting angles (front/back)
- Swing handle with lock
- Perforated front door 63% ventilation
- Perforated back door 63% ventilation

Technical Data

Dimension H*xWxD in mm	*1942x800x1500 (useful depth 745) (*without feet)
Height in U	42
Frame	19" vertical extrusions (front and back)
Gross weight	125kg
Colou	RAL 9005
Grounding concept	Each sheet steel pieces
Grounding point	Main frame

Standards

EN 62208-2004, EN 1993-1-3:2008, CE – Declaration of Conformity
EN 1991-1-1:2004


Mechanical characteristics

Welded frame construction	2.0mm sheet steel
Load rating	1000kg
Removable cable entry	300x150mm
Front door	Round vented door with swivel handle universal key
Side panel	4 side panel, sheet steel
Rear door	2 perforated sheet steel
Door opening angle	180°


This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

Drawing

Side view

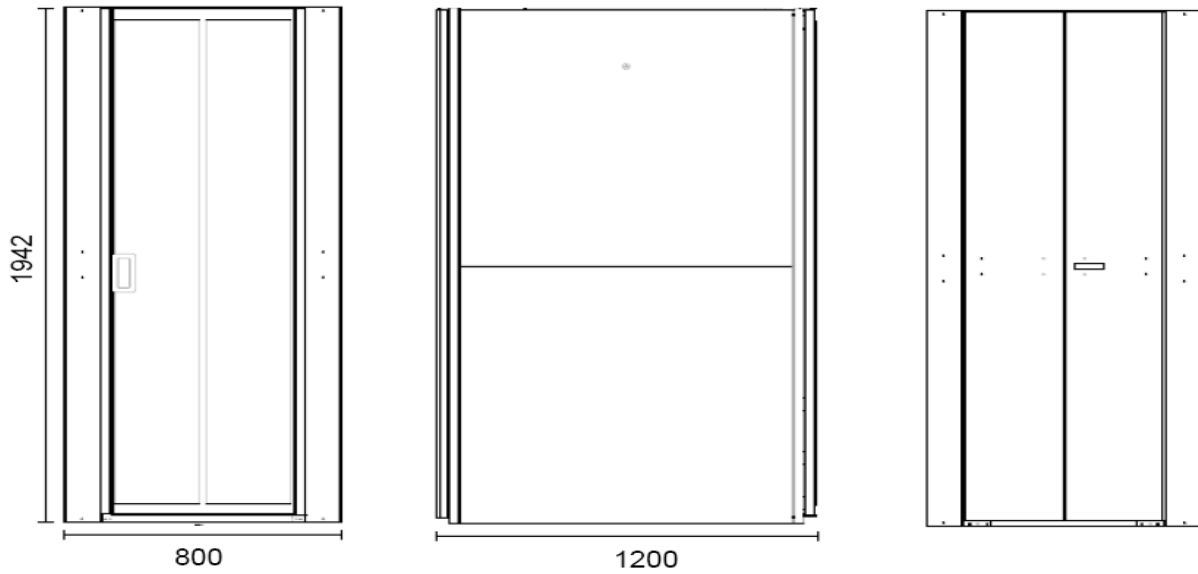

Top view

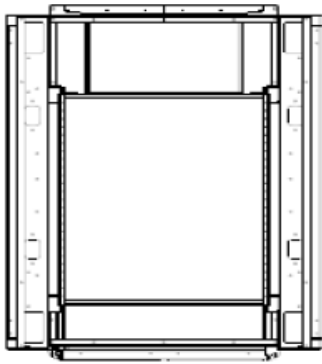

Ordering information

Description	PU	Part Number
19" Network Cabinet 42U, 800x1200 mm	1	R205215

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.