



Cabinet system designed for use as server cabinet in network environments.

- 2 pairs of 19" mounting angle (front/back)
- Swing handle with lock
- Perforated front door 63% ventilation
- Perforated back door 63% ventilation
- Zero U (up to 36 ports)
- Data mounting bracket
- Integrated PDU

Technical Data

Dimension H*xWxD in mm	*1942x**640x1100 (useful depth 725) (*without feet)(**with side door 640 wide)
Height in U	42
Frame	19" vertical extrusions (front and back)
Gross weight	100kg
Colour	RAL 9005
Grounding concept	Each sheet steel pieces
Grounding point	Main frame
Integrated Dual input PDU	2x 32A input, 2 x IEC 320 (C13 x 12;C19 x 4) output

Standards

EN 62208-2004, EN 1993-1-3:2008, CE – Declaration of Conformity
EN 1991-1-1:2004


Mechanical characteristics

Welded frame construction	2.0mm sheet steel
Load rating	1000kg
Removable cable entry	300x150mm
Front door	Round vented door with swivel handle universal key
Side panel	4 side panel, sheet steel
Rear door	2 perforated sheet steel
Door opening angle	180°


This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

Drawing

Side view

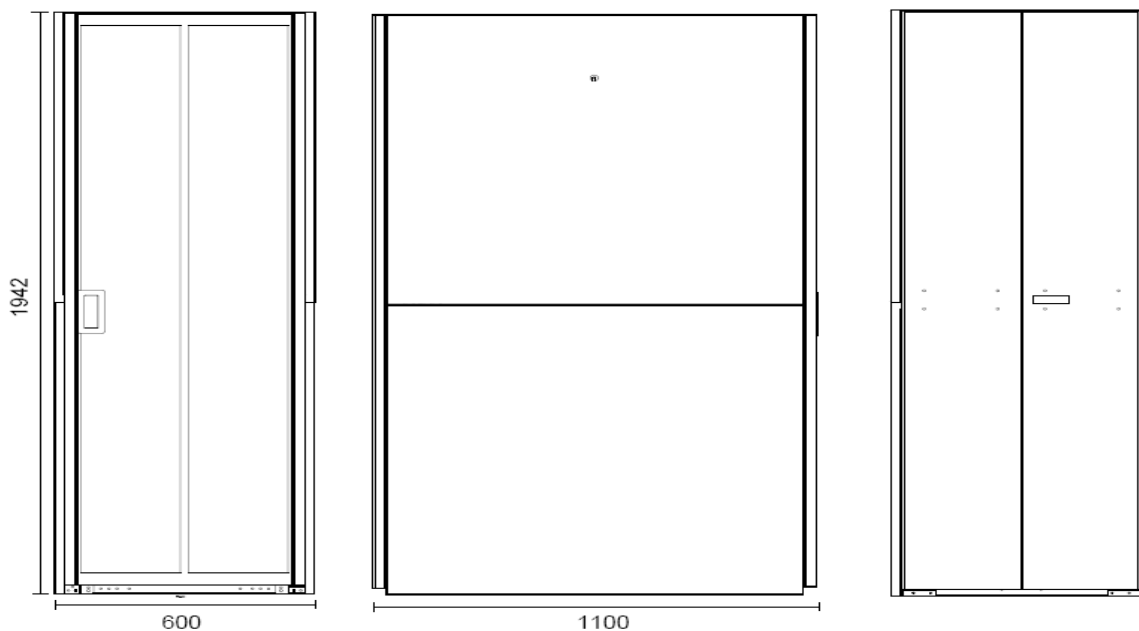

Top view



Ordering information

Part Description	Packing unit	Part number
19" Server Cabinet 42U, 600x1100 mm, with PDU	1	R205203

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

