



Cabinet system designed for use as server cabinet in network environments.

- 2 pairs of 19" mounting angle (front/back)
- Swing handle with lock
- Perforated front door 63% ventilation
- Perforated back door 63% ventilation
- Option for Zero U (up to 36 ports)

### Technical Data

Dimension H*xWxD in mm	*1942x**600x1200 (useful depth 745) (*without feet)(**with side door 640 wide)
Height in U	42
Frame	19" vertical extrusions (front and back)
Gross weight	100kg
Colour	RAL 9005
Grounding concept	Each sheet steel pieces
Grounding point	Main frame

### Standards

EN 62208-2004, EN 1993-1-3:2008, CE – Declaration of Conformity  
EN 1991-1-1:2004


### Mechanical characteristics

Welded frame construction	2.0mm sheet steel
Load rating	1000kg
Removable cable entry	300x150mm
Front door	Round vented door with swivel handle universal key
Side panel	4 side panel, sheet steel
Rear door	2 perforated sheet steel
Door opening angle	180°


### Drawing

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

Top and Side view

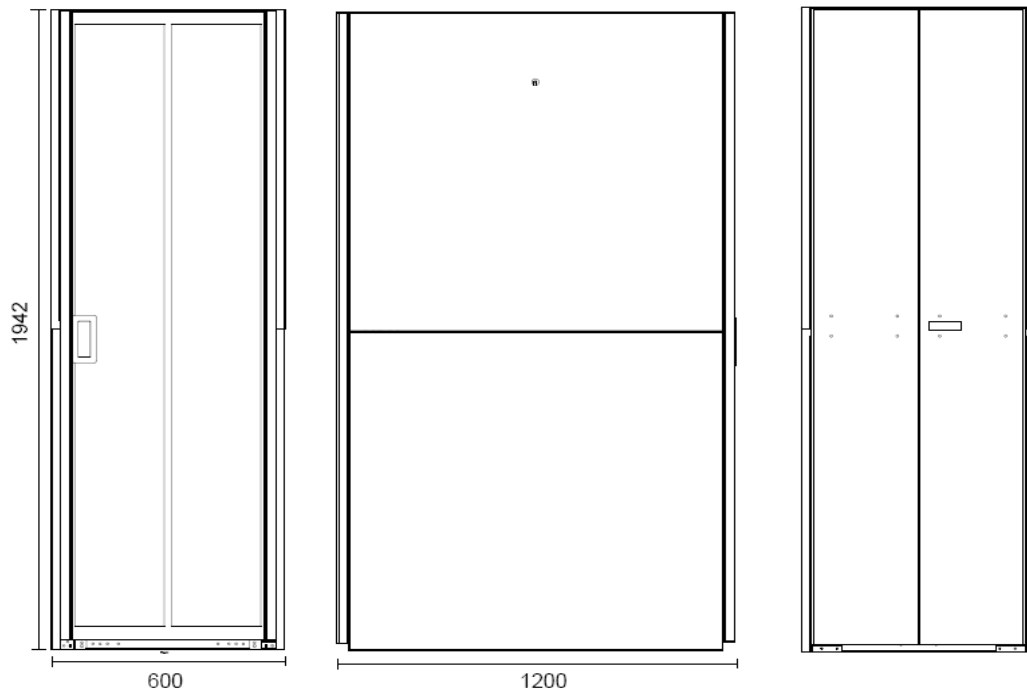

Top view

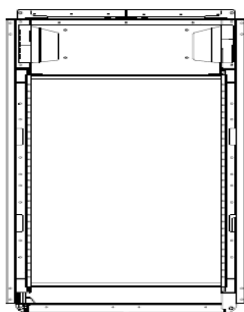

**Ordering information**

Part Description	Packing unit	Part number
19" Server Cabinet 42U, 600x1200 mm	1	R205202

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

