



Cabinet system designed for use as server cabinet in network environments.

- 2 pairs of 19" mounting angle (front/back)
- Swing handle with lock
- Perforated front door 63% ventilation
- Perforated back door 63% ventilation
- Zero U (up to 36 ports)
- Data mounting bracket
- Integrated PDU

### Technical Data

Dimension H*xWxD in mm	*19942x**600x1200 (useful depth 725) (*without feet) (**with side door 640 wide)
Height in U	42
Frame	19" vertical extrusions (front and back)
Gross weight	103kg
Colour	RAL 9005
Grounding concept	Each sheet steel pieces
Grounding point	Main frame
Power strip	2x 32A input, 2 x IEC 320 (C13 x 12;C19 x 4) output

### Standards

EN 62208-2004, EN 1993-1-3:2008, CE – Declaration of Conformity  
EN 1991-1-1:2004


### Mechanical characteristics

Welded frame construction	2.0mm sheet steel
Load rating	1000kg
Removable cable entry	300x150mm
Front door	Round vented door with swivel handle universal key
Side panel	4 side panel, sheet steel
Rear door	2 perforated sheet steel
Door opening angle	180°


This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

**Drawing**

Front and Side view

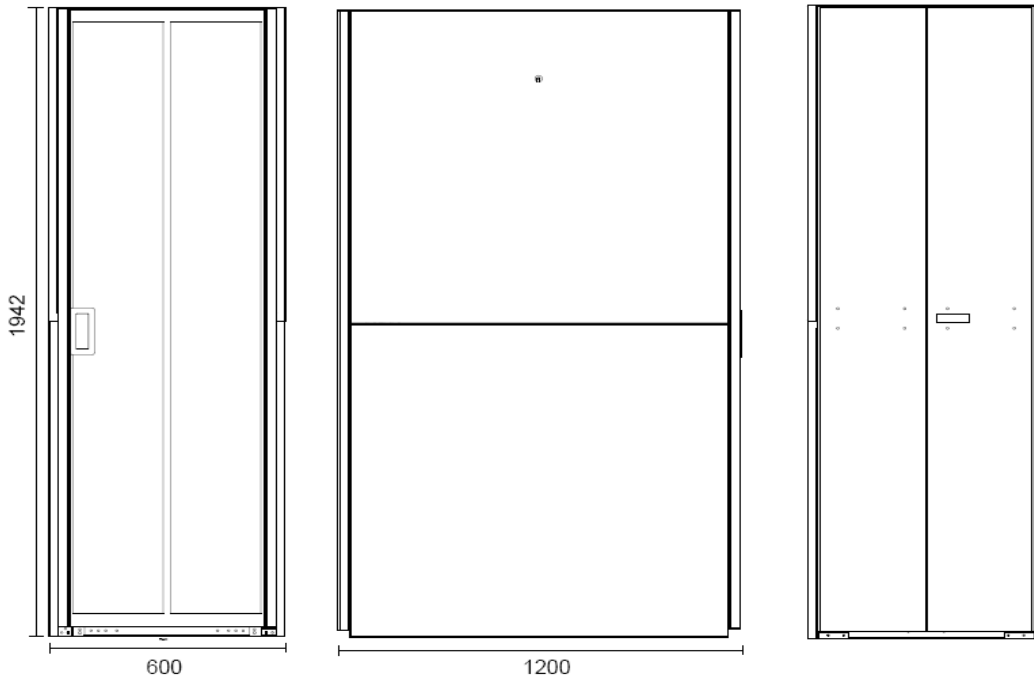

Top view



**Ordering information**

Part Description	Packing unit	Part number
19" Server Cabinet 42U, 600x1200 mm, with PDU	1	R205204

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.