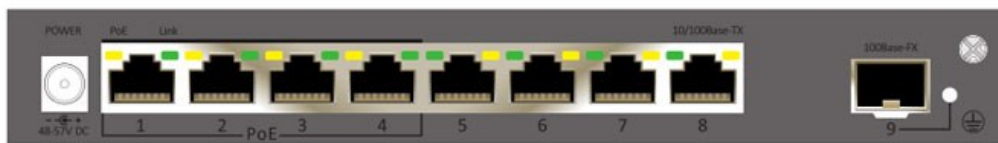


CP- TNW-HP4H4F1-6**8 Port Fast Ethernet Switch with 4 port POE and 1100FX****Main Features**

- 1 pc 100Mbps uplink SFP port, 8 pcs 100Mbps downlink Ethernet ports with 4 Ports PoE
- One key CCTV mode, 1~8 downlink ports can only communicate with uplink ports, Restrain network storm under 2Mbps; Extend downlink ports transmission distance to 250m
- Standard: Meet IEEE802.3, IEEE802.3u, IEEE802.3 af/at standards, PoE use End-Span, the spare cable can be of other use
- Protection: Excellent anti-thunder, anti-static and anti-interference ability

CP- TNW-HP4H4F1-6

8 Port Fast Ethernet Switch with 4 port POE and 1100FX

Feature

Uplink Ports
Downlink Ports
Network Standard
Switch Capacity
Packet Forwarding Rate
Exchange Type
Buffer
MAC Address List
PoE Standard
PoE Mode
PoE Power Supply
PoE Output
Surge Immunity
PoE Power Budget

Specification

1 x 10/100Base-X (SFP)
8 x 10/100Base-TX Ethernet Ports(4 Ports PoE)
IEEE 802.3/802.3u/IEEE802.3x
1.8Gbps
1.34 Mpps
Storage & Forwarding
768k
2K
802.3af/at(PSE)
End-span
1/2(+), 3/6(-)
Single PoE Output≤30W(54V DC), Whole machine PoE output≤60W
6KV: IEC61000-4-5
60W
Downlink ports only communicate with uplink ports , Extend transmission distance to 250m (Downlink Ports) , Rate:10Mbps(Downlink Ports)
Contact discharge 6K, Air discharge 8KV, Per: IEC61000-4-2
DC 48V~57V
5W
-10°C~+55°C
-40°C~+85°C
5%-95%(Non-condensing)
200mm x 101.8mm x 27mm
Gray
500g

CCTV Mode

ESD Protection

Power Source

Power Consumption

Operating Temperature

Storage Temperature

Humidity

Dimensions

Color

Weight