

EMBEDDED NETWORK VIDEO RECORDER



ENR-02032-N-LK

FEATURES

- 32-Channel input
- HDMI and VGA simultaneous output
- HDMI Video output at up to 4K
- Support H.265+, H.265, H.264 video formats
- 2 SATA HDDs, Up to 10TB for each HDD



SPECIFICATION

MODEL	Model No.	ENR-02032-N-LK
	Type	32Ch Embedded Network Video Recorder
VIDEO & AUDIO	IP Video Input	32-Ch (Upgradable to 40 Channels)
	Two-way Audio Input	1-ch, 3.5mm
	Incoming Bandwidth	320Mbps
	Outgoing Bandwidth	320Mbps
	HDMI Output	1-ch, 3840×2160, 2560×1600, 2560×1440, 1920×1080, 1280×720, 800×600, 1024×768, 1366×768, 1440×900, 1280×800
	VGA Output	1-ch, 1920×1080, 1280×720, 800×600, 1024×768, 1366×768, 1440×900, 1280×800
	Audio Output	1×RCA
	Screen Split	1/3/4/6/8/9/10/13/16/20/25/36/40
DECODING	Compression	H.265+, H.265, H.264
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Preview Capability	3×12MP, 4×8MP, 4×6MP, 5×5MP, 8×4MP, 9×3MP, 16×1080P, 32×720P, 40×4CIF
	Synchronous Playback	3×12MP, 4×8MP, 4×6MP, 5×5MP, 8×4MP, 9×3MP, 16×1080P, 16×720P
INTERFACE	Protocols	IPv6, IPv4, TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, QoS, Multicast, ARP, UDP, SNMP, SSL, Telnet, RTMP, NFS
	Network	2×RJ45 self-adaptive 10/100/1000 Mbps network interfaces
	RS485	Supported
	RS232	Supported
	USB	1×USB 2.0, 1×USB 3.0, Supported
HDD	Alarm I/O	16/4
	SATA	2 SATA interfaces for 2 HDDs
GENERAL	Capacity	Up to 10TB for each HDD
	Power	100~240V AC
	Power Consumption (without HDD)	≤25 W
	Working Environment	-10°C ~ + 55°C, Humidity: ≤ 90%
	Chassis	1U
	Dimension	47.5×277×440
Weight	2.3Kg	




EMBEDDED NETWORK VIDEO RECORDER



ENR-02032-N-LK

Dimension Unit: mm

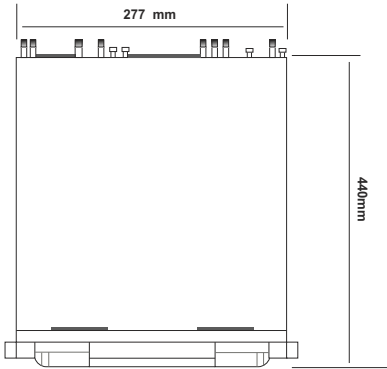

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENR-02032-N-LK	32Ch Embedded Network Video Recorder with 2 HDD Bays Supports 4K Cameras, HDMI, VGA and ONVIF	1

PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENR-02032-N-LK	Carton Box	2.3	47.5x277x440

*The image is for Reference Purpose only. The Actual Product May Vary in Shape or Appearance

