


# 2MP IR IP H.265 VANDAL PROOF COMPACT DOME CAMERA



ENV-HCV5F-30R-89

## FEATURES

- Day/night functionality
- Smart IR, Up to 30M
- H.265+, H.265, H.264, MJPEG
- ONVIF (Profile S/G/T)
- Support PoE power supply
- IP67, IK10

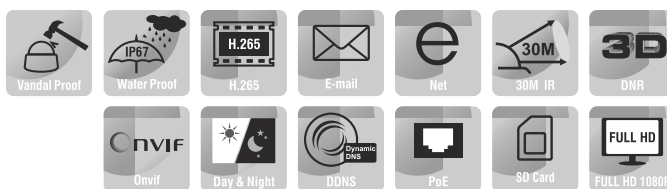

## SPECIFICATION

MODEL	Model No.	ENV-HCV5F-30R-89
CAMERA	Type	2MP IR IP H.265 Vandal Proof Compact Dome camera
	Image Sensor	1/2.9", 2.0 Megapixel, Progressive scan, CMOS
	Lens	2.8 mm Fixed Lens
	Angle of View (H)	97.4°
	Day/Night	Dual IR Cut Filter with Auto Switch
	Shutter	Auto/Manual, 1~1/100000 s
	Min. Illumination	Colour: 0.01Lux@F2.0 B/W: 0Lux with IR
	AGC	Auto/Manual
	Smart IR	Up to 30M
	S/N	52dB
	Defog	Digital Defog
	Digital noise reduction	2D/3D DNR
	WDR	Configurable
	VIDEO & AUDIO	Max.Resolution
Video Compression		H.265+, H.265, H.264, MJPEG
Frame Rate		Main Stream: (1920 x1080, 1280 x720, 704 x576, 640 x 480) @25fps (1920 x1080,1280 x720, 704 x480, 640 x480) @30fps Sub Stream: (704 x 576, 704 x 288, 640 x360, 352 x 288) @25fps (704 x 480, 704 x 240, 640 x 360, 352 x 240) @30fps
Video Bit Rate		32Kbps~6Mbps
HLC/BLC		Supported
OSD		Up to 3 OSDs
Privacy Mask		Up to 4 areas
Motion Detection		Supported
Audio Compression	G.711U/G.711A	
Audio Bit Rate	8K~48Kbps	



# 2MP IR IP H.265 VANDAL PROOF COMPACT DOME CAMERA




ENV-HCV5F-30R-89

## SPECIFICATION

<b>MODEL</b>	<b>Model No.</b>	<b>ENV-HCV5F-30R-89</b>
	Type	2MP IR IP H.265 Vandal Proof Compact Dome camera
<b>INTERFACE</b>	Protocols	IPv6, IPv4, TCP/IP, HTTP, FTP, DHCP, DNS, DDNS, MULTICAST, NTP, UDP, Telnet
	Compatibility	ONVIF (Profile S/G/T), SDK, API (Optional)
	Network	1 RJ45 10M/ 100M self adaptive Ethernet port
	Built in Mic	Supported
<b>GENERAL</b>	Power	12V DC, PoE (IEEE802.3 af)
	Power Consumption	Max.6W
	Edge Storage	Micro SD Card Slot, Up to 512 GB
	ANR	Supported
	Working Environment	-35°C ~ +65°C, Humidity : ≤95% RH(Non-condensing)
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Dimensions	120x120x90mm
Weight	0.4Kg	

Dimension Unit: mm

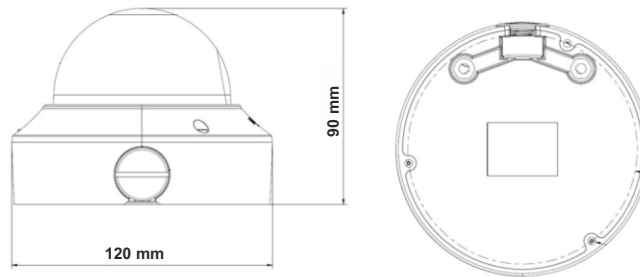

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCV5F-30R-89	2MP IR IP H.265 Vandal Proof Compact Dome camera with 2.8 Fixed Lens, POE, SD card slot, Built in Mic and 30M IR support	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross Weight (kg)	Dimension (mm)
ENV-HCV5F-30R-89	Carton Box	0.4	120x120x90

\*The image is for Reference Purpose only. The Actual Product May Vary in Shape or Appearance

